

Required 2"x6" in center at least 12" tall (or more) for torsion springs (and optional opener).


Side framing must be at least 6" taller than the door height.

1. All framing to be 2"x6" wood and must be flush with no protruding nuts or bolts.

2. Minimum headroom of _____ from top of door to ceiling.

3. Finished opening width should measure about 1-2" LESS than door width (so that the door overlaps on the inside).

4. Finished height should equal the door height.

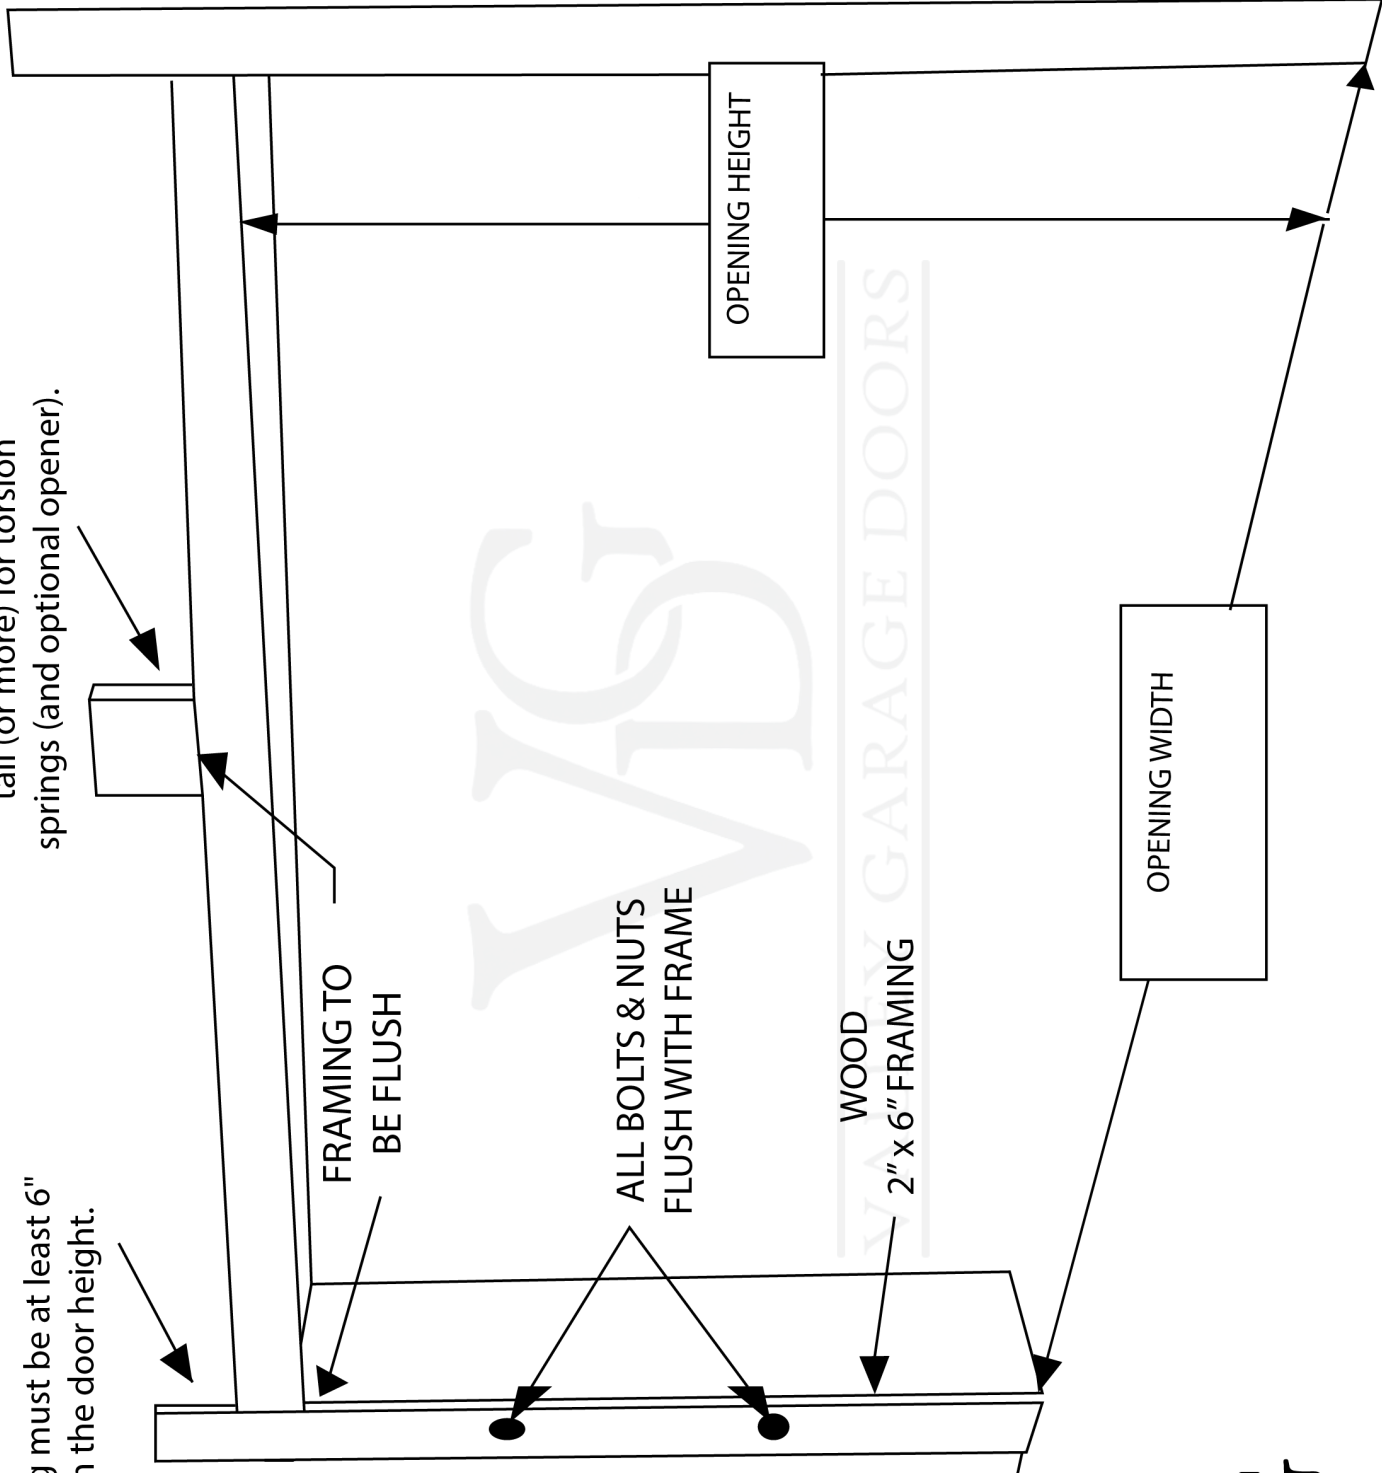

FRAMING DIAGRAM

VIG

VALLEY GARAGE DOORS